


FIGURE C8-1

HOT SEAL ALL EDGES W/12" WIDE PG 64S-22

COMMENTS

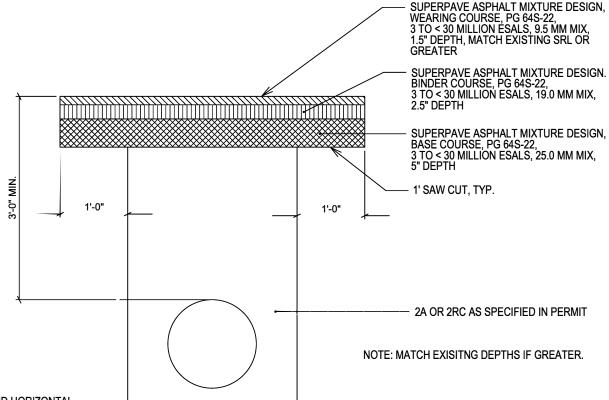

- EXPOSED VERTICAL AND HORIZONTAL SURFACES SHALL BE PREPARED AS PER PUB 408, SECT. 413.3(g).
- 2. MINIMUM 1' PAVEMENT CUTBACK, EXCAVATE OLD AND TEMPORARY MATERIAL RECOMPACT SUBBASE, TACK COAT ALL VERTICAL EDGES. INSTALL ONLY BASE COURSE AND BINDER COURSE IN ONE DAY.