

DISTRICT	COUNTY	ROUTE	SECTION	SHEET
09	CAMBRIA	0056	035	7 OF 67
REV NO	REVISIONS			DATE BY APPD


LEGEND

- ① - SUPERPAVE ASPHALT MIXTURE DESIGN, WEARING COURSE, PG 64E-22, 3.0 TO < 10.0 MILLION ESALS, 9.5 MM MIX, 1 1/2" DEPTH, SRL-E
- ② - SUPERPAVE ASPHALT MIXTURE DESIGN, BINDER COURSE, PG 64E-22, 3.0 TO < 10.0 MILLION ESALS, 19.0 MM MIX, 2 1/2" DEPTH
- ③ - SUPERPAVE ASPHALT MIXTURE DESIGN, BINDER COURSE (LEVELING), PG 64S-22, 3.0 TO < 10.0 MILLION ESALS, 19.0 MM MIX, (360 LBS/SY MIN.)
- ④ - SUPERPAVE ASPHALT MIXTURE DESIGN, BASE COURSE, PG 64S-22, 3.0 TO < 10.0 MILLION ESALS, 25.0 MM MIX, 6" DEPTH
- ⑤ - SUBBASE 2A, 9" DEPTH

NOTES:


PLACE ASPHALT TACK COAT BETWEEN EACH LAYER IN ACCORDANCE WITH PUB. 408 SEC. 460

SEAL ALL LONGITUDINAL JOINTS WITH PG 64S-22 (INCIDENTAL TO WEARING COURSE)

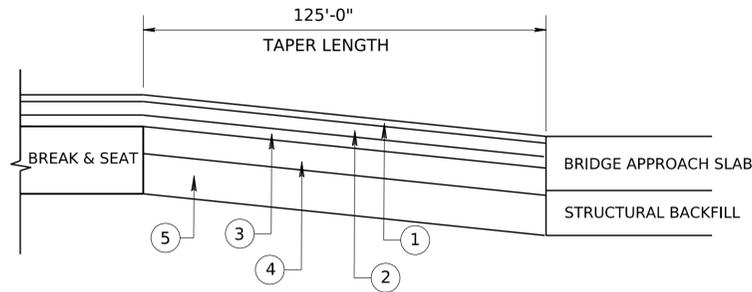


BREAK AND SEAT TRANSITION AT BRIDGES


(MIRROR FOR TRANSITION INTO CRACK AND SEAT AREA)

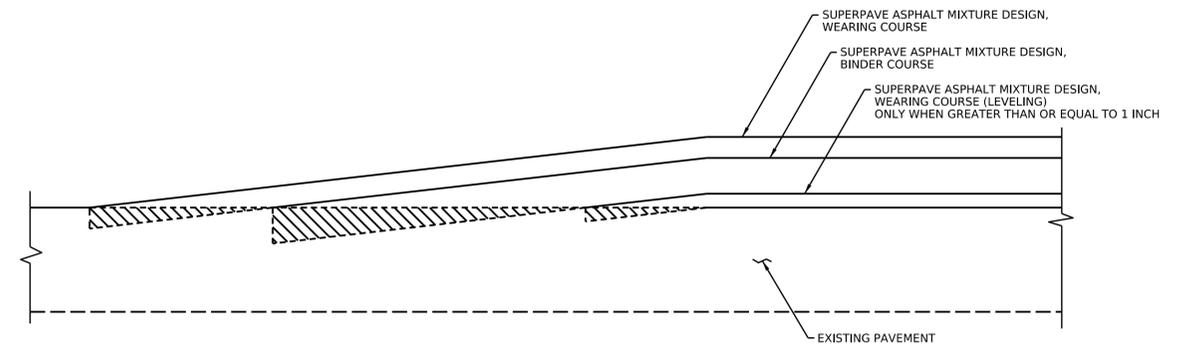


TYPICAL PAVING NOTCH DETAIL



DENOTES AN AREA OF THE EXISTING PAVEMENT TO BE MILLED TO PROVIDE PROPER TRANSITION FOR THE NEW PAVEMENT COURSE. THE DEPTH SHOULD EQUAL THE FULL DEPTH OF THE NEW PAVEMENT COURSE AND GRADUALLY TAPER TO NOTHING OVER A LENGTH (Lw, Lb, OR Ll) SHOWN IN TABLE A. THE VARIABLE DEPTH MILLING IS INCIDENTAL TO THE PAVING ITEM.

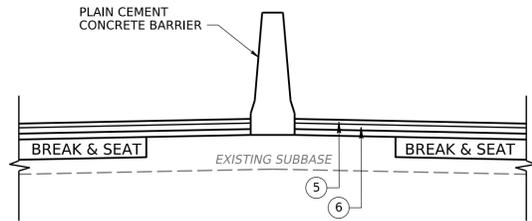

**CONCRETE MEDIAN BARRIER PLACEMENT
10' SHOULDERS**

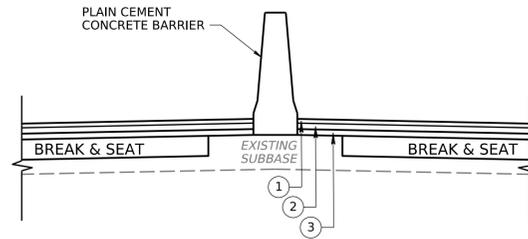

**CONCRETE MEDIAN BARRIER PLACEMENT
UP TO 10' SHOULDERS**

LEGEND

- ⑤ - SUPERPAVE ASPHALT MIXTURE DESIGN, WEARING COURSE, PG 64S-22, 0.3 TO < 3.0 MILLION ESALS, 9.5 MM MIX, 1 1/2" DEPTH, SRL-G
- ⑥ - SUPERPAVE ASPHALT MIXTURE DESIGN, WEARING COURSE (LEVELING), PG 64S-22, 0.3 TO < 3.0 MILLION ESALS, 9.5 MM MIX, SRL-L (120 LBS/SY)

NOTES:

PLACE ASPHALT TACK COAT BETWEEN EACH ASPHALT PAVEMENT COURSE, PER CONTRACT SPECIAL PROVISION (TYP.)

SEAL ALL LONGITUDINAL JOINTS WITH PG 64S-22 (INCIDENTAL TO WEARING COURSE)

LEGEND

- ① - SUPERPAVE ASPHALT MIXTURE DESIGN, WEARING COURSE, PG 64E-22, 3.0 TO < 10.0 MILLION ESALS, 9.5 MM MIX, 1 1/2" DEPTH, SRL-E
- ② - SUPERPAVE ASPHALT MIXTURE DESIGN, BINDER COURSE, PG 64E-22, 3.0 TO < 10.0 MILLION ESALS, 19.0 MM MIX, 2 1/2" DEPTH
- ③ - SUPERPAVE ASPHALT MIXTURE DESIGN, BINDER COURSE (LEVELING), PG 64S-22, 3.0 TO < 10.0 MILLION ESALS, 19.0 MM MIX (360 LBS/SY MIN.)

NOTES:

PLACE ASPHALT TACK COAT BETWEEN EACH ASPHALT PAVEMENT COURSE, PER CONTRACT SPECIAL PROVISION (TYP.)

SEAL ALL LONGITUDINAL JOINTS WITH PG 64S-22 (INCIDENTAL TO WEARING COURSE)