

TYPICAL OVERLAY ROADWAY SUPERELEVATED SECTION

SR 8018 RAMPS C AND D

RAMP C - STA 181+30.60 TO STA 188+85.56 RAMP D - STA 181+19.06 TO STA 188+85.56 NO SCALE

LEGEND

----- - BITUMINOUS PRIME COAT

- SELECT GRANULAR MATERIAL (2RC)

4"/Y - 4" YELLOW PAINT LINE

4"/W - 4" WHITE PAINT LINE


- SUPERPAVE ASPHALT MIXTURE DESIGN, WEARING COURSE, PG 64S-22, 0.3 MILLION TO < 3.0 MILLION ESALS, 9.5 MM MIX, 1 1/2" DEPTH, SRL-G

- SUPERPAVE ASPHALT MIXTURE DESIGN, BINDER COURSE PG 64S-22, 0.3 TO < 3.0 MILLION ESALS, 19.0 MM MIX, 3" DEPTH

NOTES:

PLACE ASPHALT TACK COAT BETWEEN EACH LAYER IN ACCORDANCE WITH PUB. 408 SEC. 460

SEAL ALL LONGITUDINAL JOINTS WITH PG 64S-22 (INCIDENTAL TO WEARING COURSE)

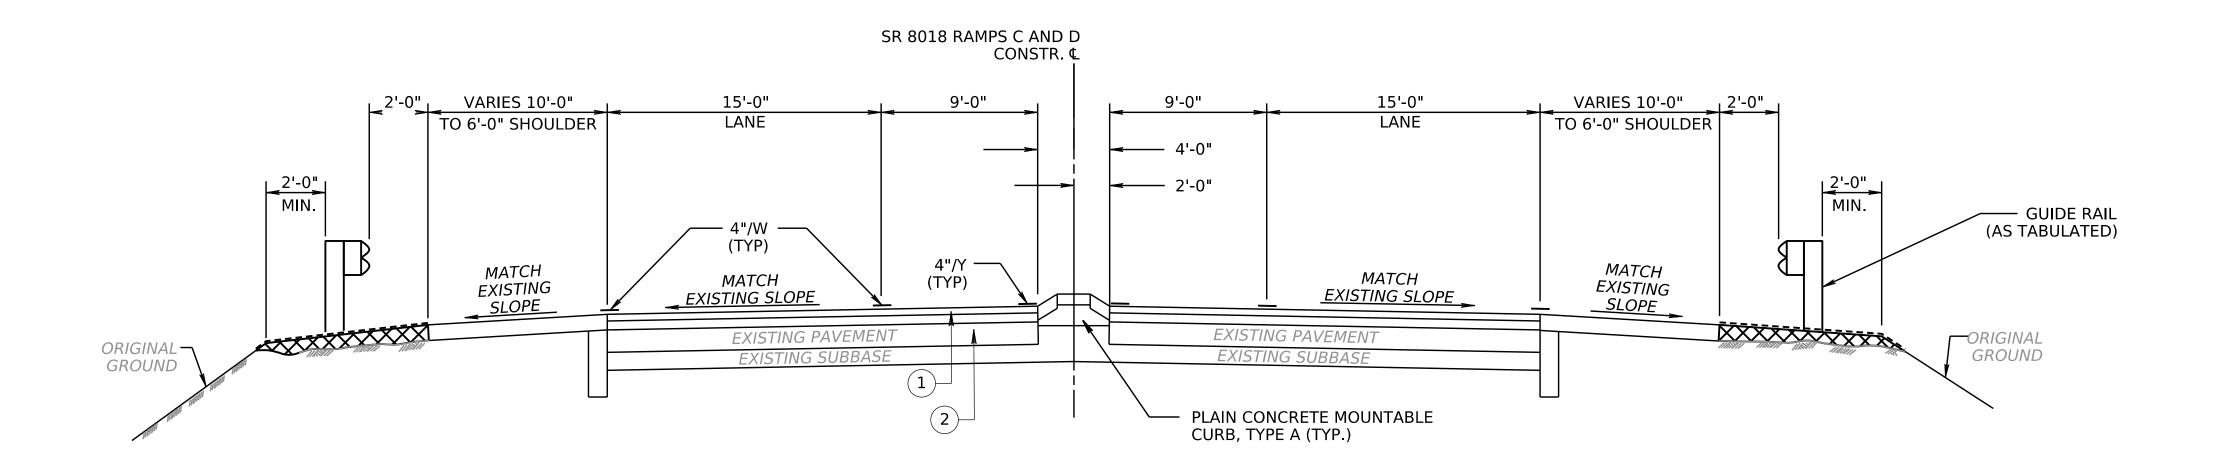

TYPICAL OVERLAY ROADWAY TANGENT SECTION

SR 8018 RAMPS C AND D

STA 188+85.56 TO STA 194+60.08 NO SCALE

