state college area
CONNECTOR

pennsylvania
DEPARTMENT OF TRANSPORTATION

Level 2A Screening

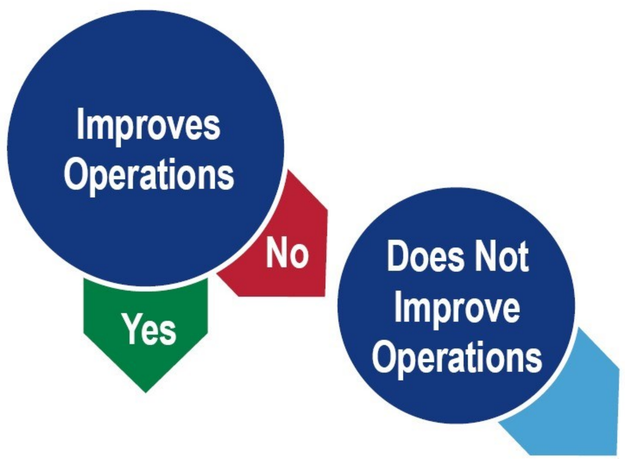

Representative Network Traffic Totals

Alternative	Network No Build (2050)		Network with Alternative (2050)		Network Reduction in AADT	Network Reduction in AADTT
	AADT	AADTT	AADT	AADTT		
Upgrade Existing	101,600*	13,550*	92,800*	12,040*	9%	11%
Build Alternative 1	153,800	28,550	89,000	8,570	42%	70%
Build Alternative 2	153,800	28,550	125,100	12,360	19%	57%

* US 322 volume removed from network totals for this Alternative.

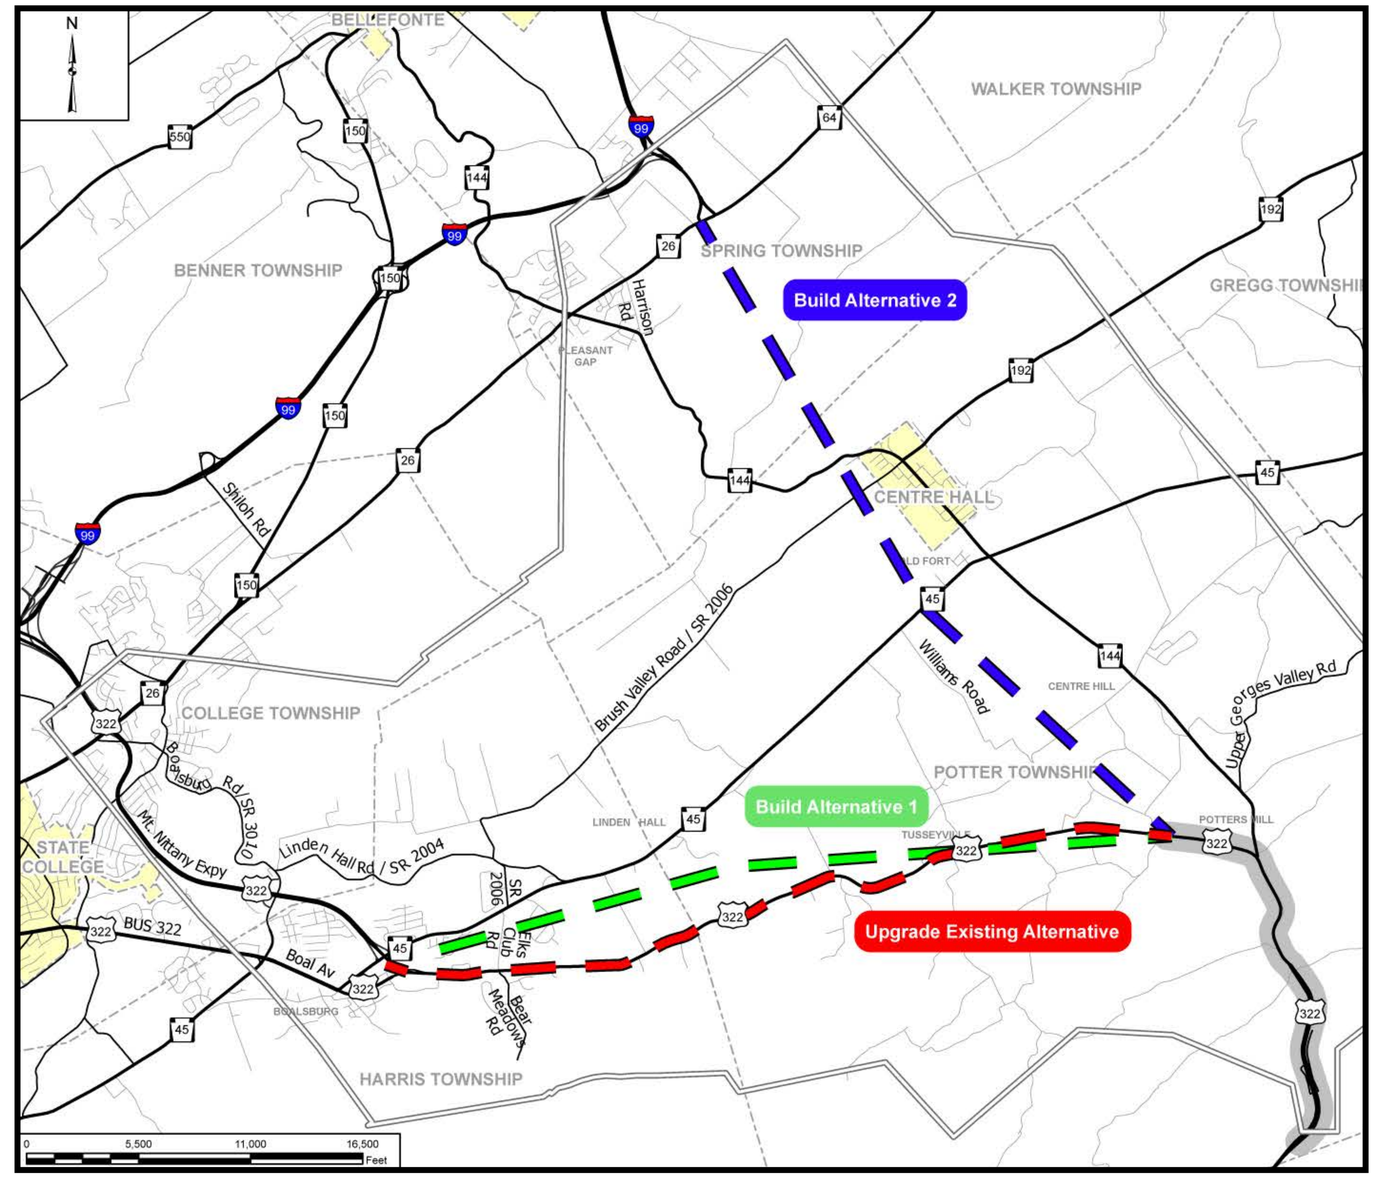

U.S. Department of Transportation
Federal Highway Administration